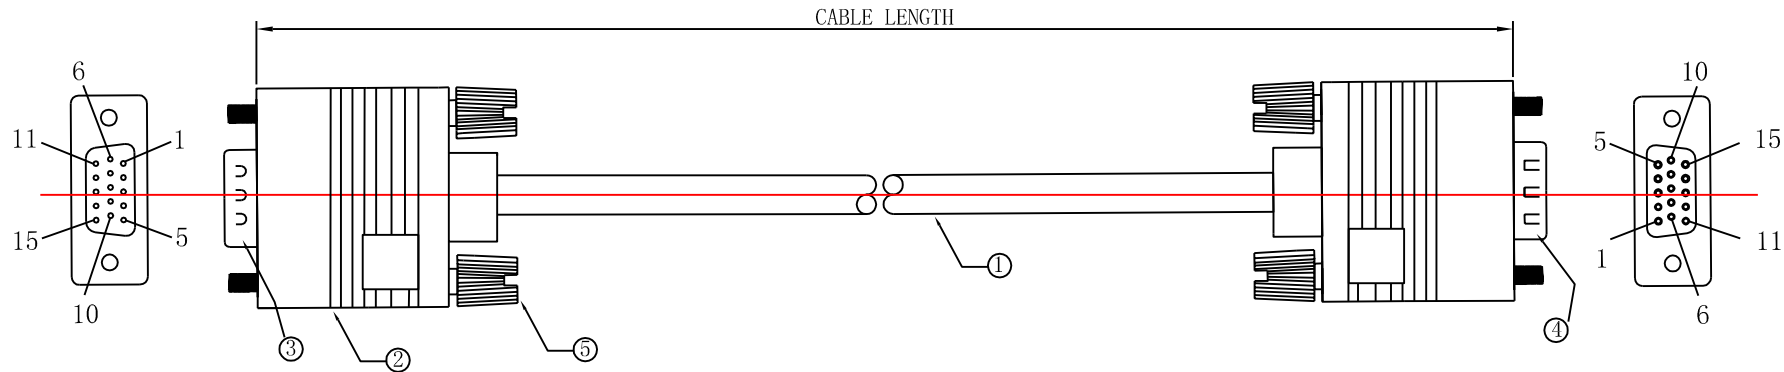




RoHS

REV.	DESCRIPTION	DATE
A		2015-08-26



NO.	SPECIFICATION
①	VGA CABLE 26AWG
②	PLASTIC MOLDING
③	VGA CONNECTOR MALE, 15PIN GOLD PLATED
④	VGA CONNECTOR MALE, 15PIN GOLD PLATED
⑤	SCREW

ITEM NO.	LENGTH
PROVGA0.5	0.5
PROVGA1	1
PROVGA2	2
PROVGA3	3
PROVGA5	5
PROVGA7.5	7.5
PROVGA10	10
PROVGA15	15
PROVGA20	20
PROVGA30	30

CABLE SPECIFICATION	PIN ASSIGNMENT
 3*MINI COAXIAL CABLE:7/0.16TINNED COPPER +1.95INSULATION+SHIELDING (ALUMINIUM FOIL+ TINNED COPPER WRAPPING)+2.8PVC JACKET) 2*SHIELDING:7/0.16TINNED COPPER +0.88INSULATION+SHIELDING (ALUMINIUM FOIL+TINNED COPPER WRAPPING) 7*7/0.16TINNED COPPER +0.88INSULATIONG ALUMINIUM FOIL+160/0.12TINNED COPPER BRAIDING HIGH FLEXIBLE PVC, 9.0MM	P1 1 ————— coaxial cable 2 ————— coaxial cable 3 ————— coaxial cable 4 ————— 5 ————— 6 ————— coaxial cable shielding 7 ————— coaxial cable shielding P2 1 2 3 4 5 6 7 P1 8 ————— coaxial cable shielding 9 ————— 10 ————— 11 ————— 12 ————— 13 ————— 14 ————— 15 ————— SH ————— P2 8 9 10 11 12 13 14 15 SH 

TITLE	VGA CABLE (MALE TO MALE)		
DRAWING NO:		DRAWER	001
REV.	A	CHECKED	
		APPROVED	
VIVO LINK			